


## Pinout description: Emulator EmuTECH Injector - 6/8

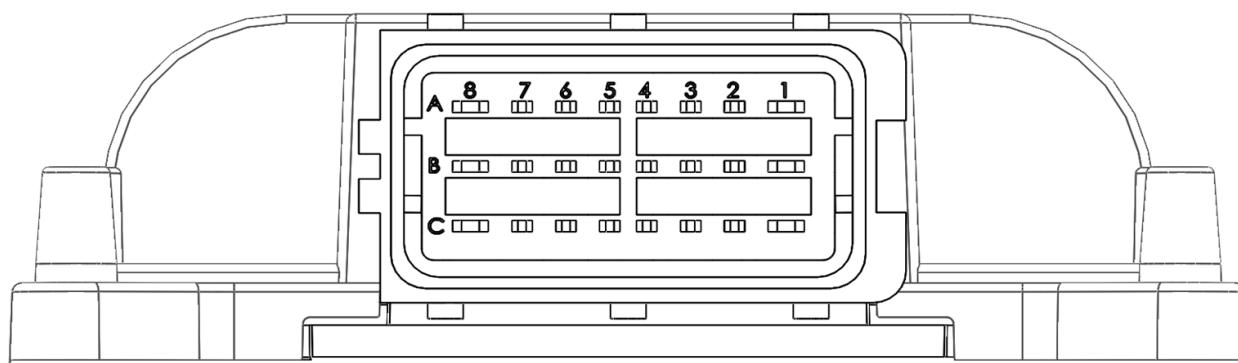

Pin no.	Type	Wire colour	Description
1A	input	yellow-white	direct petrol injector 1 - high
2A	output	blue	direct petrol injector 4 - low injector side
3A	input	green-black	direct petrol injector 2 - low ECU side
4A	input	gray-black	direct petrol injector 8 - low ECU side
5A	input	purple-black	direct petrol injector 6 - low ECU side
6A	input	brown-black	direct petrol injector 7 - low ECU side
7A	input	orange-black	direct petrol injector 5 - low ECU side
8A	input	red-black	direct petrol injector 3 - low ECU side
1B	input	green-white	direct petrol injector 2 - high
2B	input	blue-black	direct petrol injector 4 - low ECU side
3B	output	green	direct petrol injector 2 - low injector side
4B	output	gray	direct petrol injector 8 - low injector side
5B	output	purple	direct petrol injector 6 - low injector side
6B	output	brown	direct petrol injector 7 - low injector side
7B	output	orange	direct petrol injector 5 - low injector side
8B	output	red	direct petrol injector 3 - low injector side
1C	input	orange-white	direct petrol injector 5 - high
2C	input	purple-white	direct petrol injector 6 - high
3C	input	red-white	direct petrol injector 3 - high
4C	input	blue-white	direct petrol injector 4 - high
5C	input	brown-white	direct petrol injector 7 - high
6C	input	gray-white	direct petrol injector 8 - high
7C	output	yellow	direct petrol injector 1 - low injector side
8C	input	yellow-black	direct petrol injector 1 - low ECU side